




PRODUCT SPECIFICATION: KMT-818



DIMENSIONS

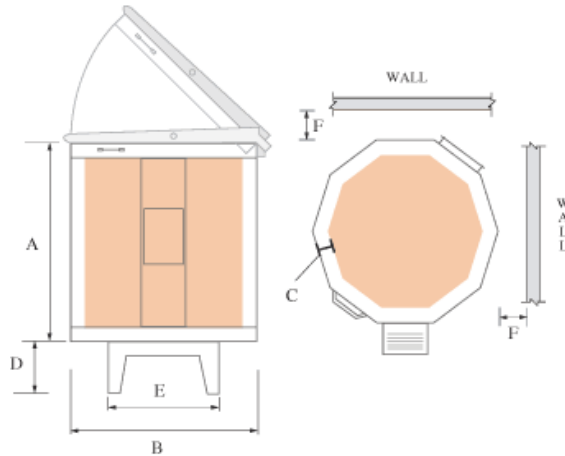

SPECIFICATIONS & DIMENSIONS

| MODEL | Phase | Volts | Maximum | | Chamber | | | O.D.Dimension | | | | | | Power | | Copper Wire Size | NEMA Recp. Conf. | BTU's |
|---------|-------|-------|---------|------|---------|---------------|--------|---------------|------|-----|---|----|----|-------|-------|------------------|------------------|-------|
| | | | Cone | Temp | Depth | Opening Width | Cu.Ft. | A | B | C | D | E | F | Amps | Watts | | | |
| KMT-818 | 1 | 208 | 10 | 2350 | 18 | 18.00 | 2.6 | 23 | 22.5 | 2.5 | 8 | 16 | 18 | 26.7 | 5550 | 8 | 6-50 | 12500 |

OPTIONAL ACCESORIES

| | |
|--------------------------|----------|
| ENVIROVENT 2 | Optional |
| KILNLINK BOX PACKAGE | Optional |
| LINKBOARD SERVICE 1 YEAR | Optional |
| LINKBOARD SERVICE 5 YEAR | Optional |

CONTROLLER

Thermocouple: Type K
 Clock: 60 Mhz
 Voltage: 24 DC Relays
 Output: 12 Volts DC
 Fuse: 1 AMP

